Bathroom drains





The final touch.

Bathroom drains Wall drains Shower channels Stylish whatever the design.





Wall drains

Clear edge. Exclusive design drains for barrier-free bathrooms.

Page 12



Bathroom drains

Good point. Classic drains in numerous variations.

7 Page 18

Shower channels

Beautiful line. Stylish drains with rim insert in timeless stainless steel design.

Page 28

Style that works.

The fact that we are stylish is confirmed by numerous design prizes. That is nice. The fact that our products work outstandingly well is confirmed daily by our customers. That is important.

Which is why we give our all day in, day out, for your satisfaction. By only using the best materials. By offering accessories for a whole range of different requirements. And by relying consistently on the highest production standards.





High-quality materials. The delight at a newly designed bathroom should be more than short-term. Which is why we do not compromise as far as material selection is concerned. Whether classical stainless steel or innovative compound material is involved: with our high-quality materials we guarantee the maximum possible durability and safety for our bathroom drains.



Sensible accessories. Typical for KESSEL: like all our products, our bathroom drains are not only pretty to look at, they are extremely versatile too. In our comprehensive range of accessories you will find the right answer to all the challenges your application presents to our drains.



Global presence. Outstanding quality. KESSEL drainage solutions are coveted all over the world – more than 50 export markets speak for themselves. Our global success is thanks to the quality mark "Made in Germany" to a large extent: our bathroom drains are manufactured exclusively at our main production plant in Lenting near Ingolstadt.













Clear edge. Wall drains

Take a firm line: the design prize-winning wall drain *Scada* is a real "eye-catcher" that gives bathrooms a quite exclusive look. Rather than being in the floor, this compact drain is set into the wall, thus creating the pre-requisites for a 100% floor-level and freely accessible shower. There is a choice of four high-grade drain covers available for Scada – even including versions with LED lighting!



14 Wall drains Scada LED Only from KESSEL: LED lighting with automatic colour-changing program or individual selection of light colour.

Clear advantage.

Features of our wall drains



Connections on three sides

Thanks to different connection options (front, lateral left or right) there is no room-side twisting of the drain pipe necessary and the installation of underfloor heating underneath the shower is no problem.



Height-adjustable installation supports The height-adjustable installation supports of the dry-walling version allow convenient adjustment of the overall installation height from 80 to 215 mm up to the top edge of the tile.

Clear decision.

Wall drains range

Scada

The Scada is available with four different stainless steel drain covers. If necessary, the wall drain can also be pre-assembled and delivered sealed in an installation board. All versions offer a flow rate of 0.5 l/s.

Scada drain covers








Stainless steel 312×74 mm (W × H) for floor tiles up to 17 mm.



 312×74 mm (W × H) for floor tiles up to 10 mm.



Stainless steel $312 \times 67 \, \text{mm} (\text{W} \times \text{H}) \, \text{for}$ floor tiles up to 10 mm.



Scada with factory-mounted waterproofing membrane


| Drain cover | Art. no. |
|-----------------------------|------------|
| | 48 000.01M |
| Stainless steel up to 10 mm | 48 000.02M |
| Wave | 48 000.03M |
| Stainless steel up to 17 mm | 48 000 04M |



waterproofing membrane Drain cover Art. no. Invisible 48 003.41M Stainless steel up to 10 mm 48 003.42M

Stainless steel up to 17 mm 48 003.44M

48 003.43M



Scada with installation board

| Drain cover | Art. no. |
|-----------------------------|-----------|
| 900 × 200 mm | |
| Invisible | 48 001.01 |
| Stainless steel up to 10 mm | 48 001.02 |
| Wave | 48 001.03 |
| Stainless steel up to 17 mm | 48 001.04 |
| 1200 × 200 mm | |
| Invisible | 48 002.01 |
| Stainless steel up to 10 mm | 48 002.02 |
| Wave | 48 002.03 |
| Stainless steel up to 17 mm | 48 002.04 |



LED

LED lighting

with automatic colour-changing program or individual changing program colour selection of light colour

Scada LED with installation board

| Drain cover | Art. no. |
|-----------------------------|-----------|
| 900 × 200 mm | |
| Invisible | 48 004.41 |
| Stainless steel up to 10 mm | 48 004.42 |
| Wave | 48 004.43 |
| Stainless steel up to 17 mm | 48 004.44 |
| 1200 × 200 mm | |
| Invisible | 48 005.41 |
| Stainless steel up to 10 mm | 48 005.42 |
| Wave | 48 005.43 |
| Stainless steel up to 17 mm | 48 005.44 |

Accessories



Hair filter Made of polymer.

Art. no. 48 800








Dry-walling board 623×300 mm (W × H) for post-and-beam structure. With installation adhesive.

Art. no. 48 063



Sealing gasket set Adhesive and sealing strips for board elements.

Art. no. 48 062



Wedge as shower board With three-sided slope. Only for Scada/Scada LED with installation board.

| Dimensions (L \times W \times H) | Art. n |
|---|--------|
| 900 × 900 × 80 mm | |
| 12.4% 20.8% 32.4% | 48 05 |
| 1200 × 1200 × 85 mm | |
| 1 3.7% 2 1.1% 3 3.7% | 48 05 |

Art. no. 48 400

Good point.

Bathroom drains

As far as classical drainage is concerned, our varied range of bathroom drains leaves nothing to be desired. No matter whether the bathroom project is in a new building, involves conversion or refurbishment work: the sophisticated functions and numerous combination options made possible by the modular principle make our bathroom drains suitable for almost all applications – and the different design covers made of stainless steel guarantee their stylish appearance.





















Good thinking.

Features of our bathroom drains



Low installation depth Our low-profile bathroom drains The Superflat and The Ultraflat are particularly suitable for renovation projects thanks to their low installation depths.



Convenient cleaning and maintenance The locking and removal device Lock & Lift makes inserting and locking or unlocking and removing the cover ultra fast. This saves time during mandatory daily cleaning in the commercial sector.

Good choice.

Bathroom drains range

Covers

Choose from different design covers made of stainless steel and the tileable variant Invisible in order to design our bathroom drains to your own taste.
















Classic System 100

The *Classic* model is the all-rounder among our bathroom drains. Its compact size, lateral or vertical outlet and various installation options make it particularly versatile. The flow rate is 0.8 l/s.






Classic with shallow bed upper section

| outtet | class | | AI L. IIU. |
|--------------|-------------------|-----------|------------|
| Ø 50 | | | |
| lateral | <i>Oval,</i> L 15 | 120 × 120 | 40 150.54 |
| lateral | Slotted, K 3 | 95 × 95 | 40 150.50 |
| lateral | Slotted, K 3 | 138 × 138 | 40 150.51 |
| vertical | <i>Oval,</i> L 15 | 120 × 120 | 40 250.54 |
| vertical | Slotted, K 3 | 100 × 100 | 40 250.50 |
| vertical | Slotted, K 3 | 150 × 150 | 40 250.51 |
| Ø 7 5 | | | |
| lateral | <i>Oval,</i> L 15 | 120 × 120 | 40 170.54 |
| lateral | Slotted, K 3 | 95 × 95 | 40 170.50 |
| lateral | Slotted, K 3 | 138 × 138 | 40 170.51 |
| vertical | <i>Oval,</i> L 15 | 120 × 120 | 40 270.54 |
| vertical | Slotted, K 3 | 95 × 95 | 40 270.50 |
| vertical | Slotted, K 3 | 138 × 138 | 40 270.51 |





Classic with removable odour trap, with glued flange

| Uutlet | class | IN MM | Art. no |
|----------|--------------|-----------|-----------|
| Ø 50 | | | |
| lateral | Slotted, K 3 | 100 × 100 | 40 150.90 |
| vertical | Slotted, K 3 | 100 × 100 | 40 250.90 |
| Ø 75 | | | |
| lateral | Slotted, K 3 | 100 × 100 | 40 170.90 |
| vertical | Slotted, K 3 | 100 × 100 | 40 270.90 |
| | | | |










Classic with removable odour trap

| Outlet | class | in mm | Art. no |
|----------|----------------|-----------|-----------|
| Ø 50 | | | |
| lateral | Invisible, K 3 | 110 × 110 | 40 150.66 |
| lateral | Slotted, K 3 | 100 × 100 | 40 150.20 |
| vertical | Invisible, K 3 | 110 × 110 | 40 250.66 |
| vertical | Slotted, K 3 | 100 × 100 | 40 250.20 |
| Ø 75 | | | |
| lateral | Invisible, K 3 | 110 × 110 | 40 170.66 |
| lateral | Slotted, K 3 | 100 × 100 | 40 170.20 |
| vertical | Invisible, K 3 | 110 × 110 | 40 270.66 |
| vertical | Slotted, K 3 | 100 × 100 | 40 270.20 |
| | | | |





Classic with double waterproofing layer


Good combination.

www.kessel.com/modular-system

For even more options: the modular system for bathroom drains

| Uutlet | class | IN MM | Art. no. |
|--------------|--------------|---------|-----------|
| Ø 50 | | | |
| lateral | Slotted, K 3 | 95 × 95 | 40 159.50 |
| vertical | Slotted, K 3 | 95 × 95 | 40 259.50 |
| Ø 7 5 | | | |
| lateral | Slotted, K 3 | 95×95 | 40 179.50 |
| vertical | Slotted, K 3 | 95 × 95 | 40 279.50 |
| | | | |





Classic with clamped flange

| Outlet | Cover, class | in mm | Art. no. |
|----------|-----------------|-----------|-----------|
| Ø 50 | | | |
| lateral | Slotted, K 3 | 120 × 120 | 40 150.30 |
| vertical | Slotted, K 3 | 120 × 120 | 40 250.30 |
| Ø 75 | | | |
| lateral | Slotted, K 3 | 120 × 120 | 40 170.30 |
| vertical | Slotted, K 3 | 120 × 120 | 40 270.30 |


The Superflat System 100

With its low overall height of 90 mm including cover, The Superflat is especially suitable for low installation depths. The upper section can be shortened according to requirements. The flow rate is 0.8 l/s, the outlet is lateral



The Superflat with removable odour trap, with glued flange

| Outlet | Cover, class | in mm | Art. no. |
|---------|-----------------|-----------|-----------|
| Ø 50 | | | |
| lateral | Slotted K 3 | 100 × 100 | A2 701 91 |





The Superflat with removable odour trap, with glued flange

| Outlet | class | in mm | Art. no |
|---------|----------------|-----------|----------|
| Ø 50 | | | |
| lateral | Invisible, K 3 | 110 × 110 | 42 701.9 |



The Superflat with removable odour trap, with *Variofix* shallow bed upper section

| Outlet | class | in mm | Art. no. |
|--------------------|-----------------------------------|----------------------|------------------------|
| Ø 50 | | | |
| lateral lateral | <i>Oval,</i> L 15 Slotted, K 3 | 120 × 120 95 × 95 | 42 701.54 42 701.50 |



The Superflat with removable odour trap

| Outlet | Cover, class | in mm | Art. no. |
|---------|-----------------|-----------|-----------|
| Ø 50 | | | |
| lateral | Slotted, K 3 | 100 × 100 | 42 701.20 |

Rim and cover

27 196G

stainless



Modular design

Drain body Floordrain ME





With three inlets Ø 55 mm and one outlet Ø 75 mm, with removable odour trap. The

flow rate is 1.8 l/s.

Art. no. 373 001

Upper sections





| Class L 15 | | | |
|------------|-----------|---------|--------|
| Kessel | 120 × 120 | with | 27 201 |
| Kessel | 120 × 120 | without | 27 225 |
| Oval | 120 × 120 | with | 27 202 |
| Oval | 120 × 120 | without | 27 226 |
| Class K 3 | | | |
| Spot | 120 × 120 | with | 27 221 |
| Spot | 120 × 120 | without | 27 220 |
| Cross | 120 × 120 | with | 27 213 |
| Cross | 120 × 120 | without | 27 212 |
| Parade | 120 × 120 | with | 27 215 |
| Parade | 120 × 120 | without | 27 214 |
| Slot | 120 × 120 | with | 27 219 |
| Slot | 120 × 120 | without | 27 218 |
| Sticks | 120 × 120 | with | 27 217 |


120 × 120

27 216

Lock & Lift












class



| Cover, class | in mm | Features | Art. no. |
|-----------------|-----------|------------------------|----------|
| Invisible, K 3 | 110 × 110 | Rim stainless steel | 27 211 |
| Invisible, K 3 | 110 × 110 | - | 27 210 |



138 × 138 non-slip

138 × 138



27 176

27 196





| class | in mm |
|--------------|-----------|
| Closed, L 15 | 150 × 150 |



44 700.52

44 700.53


The Ultraflat system 125

The name speaks for itself: the The Ultraflat is our flattest bathroom drain and thus perfect for renovation work in existing buildings. It offers a flow rate of 0.6 to 1.0 l/s.




Cover.class

The Ultraflat 54 with factory-mounted waterproofing membrane



Features

Art. no.



Cover.class

The Ultraflat 54 with non-mounted waterproofing membrane

| Clatted I/ O | | MM 44.740.20 |
|-----------------|--------------------------------------|--------------|
| Slotted, K 3 | _ | 44 740.2 |
| Kessel, L 15 | _ | 44 740.6 |
| Kessel, L 15 | Lock & Lift | 44 740.6 |
| Ø 50 Interal ou | tlat cover 120 v 120 | mm |
| | tlet, cover 120 × 120 | |
| Slotted, K 3 | tlet, cover 120 × 120 – | 44 750.2 |
| | tlet, cover 120 × 120 _ _ _ | |

Features

Art. no.



Cover, class

Slotted, K 3

Kessel, L 15

Kessel, L 15

Kessel, L 15



Art. no. 44 700.66





Art. no. 44 700.20 Art. no. 44 700.62



Features

Lock & Lift


Lock & Lift,

Megastop

Ø 50, lateral outlet, cover 120 × 120 mm

The Ultraflat 79 without waterproofing membrane

| Art. no. | i ne vitrajil |
|------------------------|---------------------|
| | with <i>Variofi</i> |
| | bed upper s |
| 44 700.20 | and non-mo |
| 44 700.62 44 700.63 | waterproof |
| 44 700.66 | membrane |
| | |





Kessel, L 15

Kessel, L 15

| Cover, class | Features | Art. no. |
|------------------|------------------------------|----------|
| Ø 50 lateral out | tlet, cover 120 × 120 mm | |
| D Oo, tatorat ou | | |

Lock & Lift

incl. clips flange with factory-mounted waterproofing membrane

| Cover, class | Features | Art. no |
|-------------------|----------------------|-----------|
| Ø 50, lateral out | let, cover 120 × 120 | mm |
| Slotted, K 3 | _ | 44 700.20 |

Accessories System 100 System 125









Mechanical odour trap with water seal.





Waterless rodent, foam and odour stop.





Made of polymer.



Installation aid

Installation aid set made of polymer for comfortable fixing and screwing.



Clip flange

Made of polymer. With factorymounted waterproofing membrane.

| | , | |
|---|------------|------------------|
| The Ultraflat | 125 | 48 550 |
| Suitable for | System | Art. no. |
| Classic, The Superflat The Ultraflat | 100 125 | 43 500 48 500 |
| Suitable for | System | Art. no. |
| Classic, The Superflat The Ultraflat | 100 125 | 43 700 48 700 |
| Suitable for | System | Art. no. |
| The Ultraflat | 125 | 44 702 |
| Suitable for | System | Art. no. |
| The Ultraflat | 125 | 44 703 |
| | | |



Conversion kit Push fit

Consists of 3 inlet adapters Ø 50 mm, 1 outlet adapter Ø 75 mm and 1 connection for upper section Ø 110mm, EN1451-1.

| Suitable for | System | Art. no |
|---------------|--------|---------|
| Floordrain ME | 100 | 373 008 |



Conversion kit Glue fit

Consists of 3 inlet adapters Ø 50 mm and 1 outlet adapter Ø 75 mm, EN 1451-1

| uitable for | System | Art. no. |
|--------------|--------|----------|
| loordrain ME | 100 | 373 007 |







Extension section

Made of polymer. With lip seal.

| uitable for | System | Art. no. |
|------------------------|--------|----------|
| Classic, The Superflat | 100 | 27 146 |

Beautiful line.

Shower channels

Good design is timeless – our shower channels *Linearis* are certainly no exception to this. Their reduced design and high-quality stainless steel make them an optical highlight that you will never tire of seeing. And even if you do, the shower channels can simply be redesigned for a new look thanks to their turnable and tileable stainless steel cover. No matter what: with *Linearis* roomside or near to the wall there are quite literally no limits to barrier-free shower convenience.




Beautifully practical.

Features of our shower channels




Height-adjustable installation supports Thanks to the gradual height adjustment of the installation supports, the installation height can be freely adapted to the floor level.

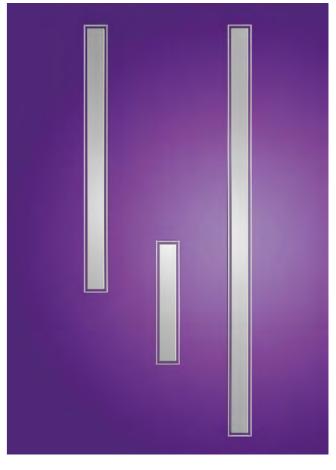

Different channel lengths

Our shower channels are available in lengths of 300 to 1150 mm and can thus be used in differently dimensioned shower areas.

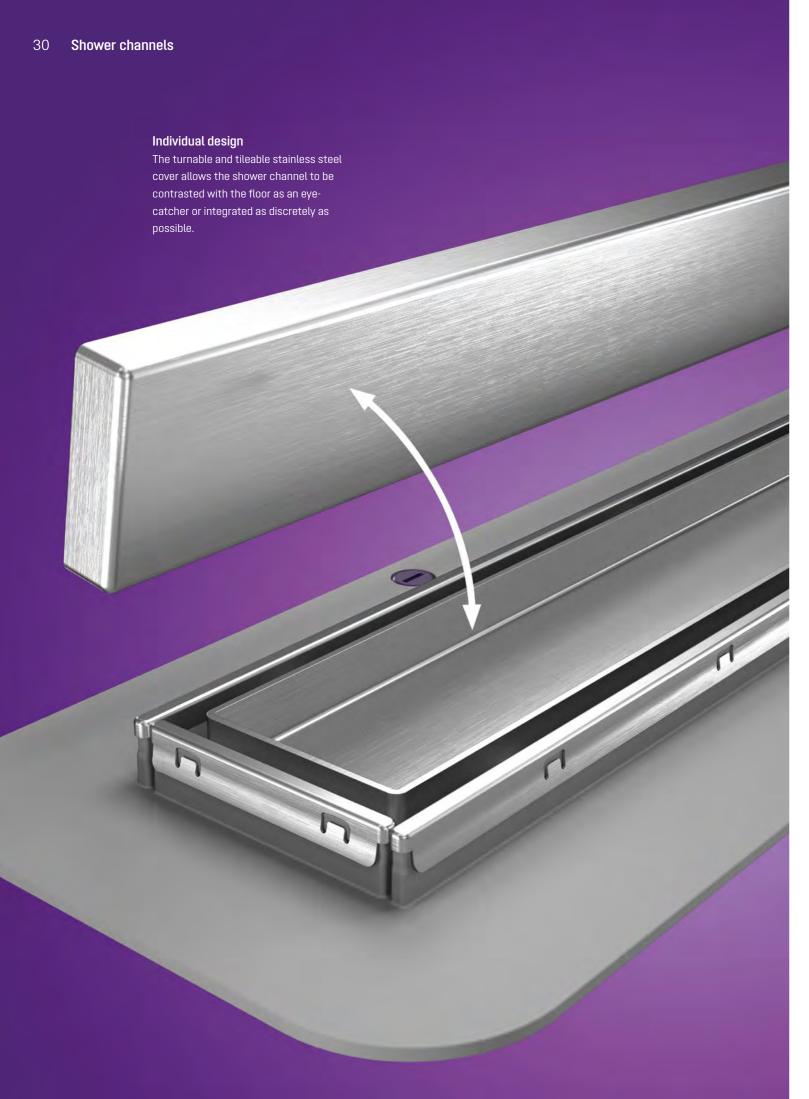

Beautifully individual.


For even more options: the modular system for shower channels

Beautifully versatile.

Shower channels range

Linearis Comfort

The elegant solution: the Linearis Comfort with factory-mounted waterproofing membrane is our premium shower channel for maximum showering convenience. It provides a barrier-free experience, best sound-proofing features and a flow rate or 1.1 l/s / 1.0 l/s with 10 mm / 0 mm water head.



Linearis Comfort

| Length (mm) | Art. no. |
|-------------|------------|
| 750 | 45 600.83M |
| 850 | 45 600.84M |
| 950 | 45 600.85M |
| 1050 | 45 600.86M |
| 1150 | 45 600.87M |
| | |

Accessories



Multistop Waterless rodent, foam and odour stop.

Art. no. 48 400

Linearis Compact

Our shower channel Linearis Compact with non-mounted waterproofing membrane is a dream for all those who value puristic, timeless design in the bathroom. Its compact height also makes it suitable for renovation work and a flow rate of $0.6 \, l/s / 0.5 \, l/s$ with 10 mm / 0 mm water head.



Linearis Compact with non-mounted waterproofing membrane

Length (mm)

300

450

550

650

750

850

950

1050

Art. no. Art. no. Length (mm) 45 600.59 45 600.59M 300 45 600.60 450 45 600.60M 45 600.61 550 45 600.61M 45 600.62 650 45 600.62M 45 600.63 750 45 600.63M 45 600.64 850 45 600.64M 45 600.65 950 45 600.65M 45 600.66 1050 45 600.66M 45 600.67 1150 45 600.67M

Linearis Compact

with factory-mounted

waterproofing membrane

Hair filter Made of polymer.

Art. no. 48 800

Linearis Compact

Modular design

The Linearis Compact with non-mounted waterproofing membrane can also be delivered as an upper section that can be combined with all drain bodies and accessory parts of the modular system 100.





| Art. no. |
|----------|
| 47 804S |
| 47 805S |
| 47 806S |
| 47 807S |
| 47 808S |
| 47 809S |
| 47 810S |
| 47 811S |
| 47 812\$ |
| |





Drain body Classic Ø 50, without odour trap

| Outlet | Art. no |
|----------|---------|
| Ø 50 | |
| lateral | 40 15 |
| vertical | 40 25 |
| Ø 75 | |
| lateral | 40 17 |
| vertical | 40 27 |



Installation aid Installation aid can be shortened individually as screed substitute. With installation adhesive.

| Product | Art. no. |
|------------------|----------|
| Linearis Comfort | 48 640 |
| Linearis Compact | 48 639 |

A company with style.

Since 1963, KESSEL has stood like no other company for innovative and safe drainage technology. We have established ourselves as the impulse generator of the branch for decades and are now a premium international supplier.









92,920 m² € 103 million annual turnover (2018)


54 export markets

Alongside continuous quality assurance, environmental protection, energy efficiency as well as health and safety at work are especially important to us - both in production and during the operation of our products in the field.

We also set great store by sustainability in our customer relations. For this reason, we offer a unique range of services from consultation and planning through installation and commissioning to regular maintenance.

One thing is certain: we remain with quality, innovation, safety and service at the top among the leaders in technology development to live up to our vision again and again:

KESSEL - Leading in drainage





KESSEL factory grounds, Lenting

Leading in drainage.

No matter whether the task involves discharging water, wastewater treatment or backwater protection: if the best solution is required, there is no option but KESSEL.


Backwater protection

Lifting stations and pumps

Separating technology

Drainage technology



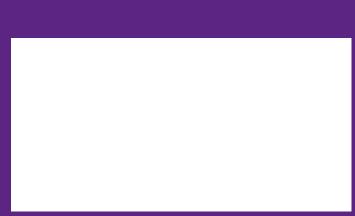

Subject to technical modifications

KESSEL AG

Bahnhofstraße 31 • 85101 Lenting • Germany www.kessel.com